




ASA 150-ASA 300-ASA 600 ASA 900 DÖKÜM ÇELİK SWING CHECK VALFLER

Cast Steel Swing Check Valves Figure V 4010-V 4020-V 4030-V 4040

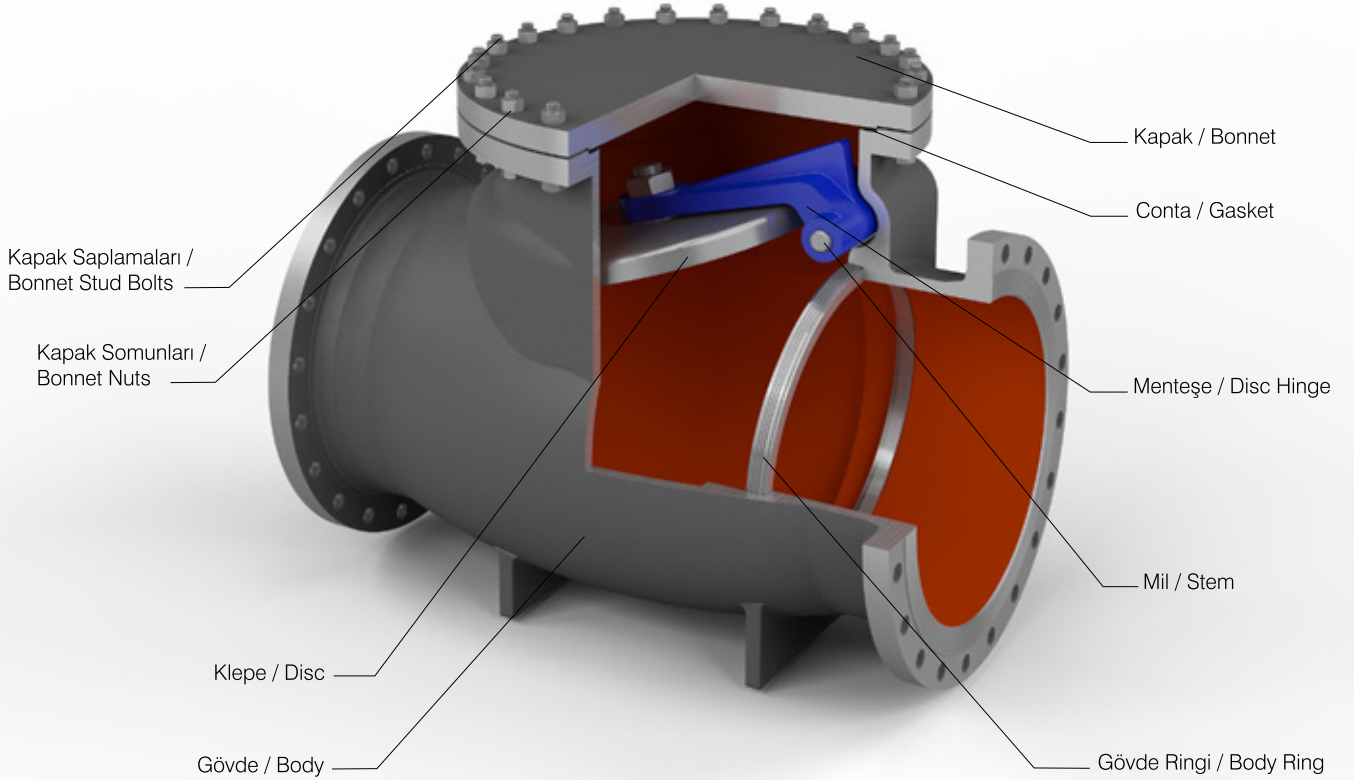

Design standard: API 6D&BS 1868&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D
Operating pressure-temperatures are according to ASME B16.34


ASA 150-ASA 300-ASA 600 ASA 900 DÖKÜM ÇELİK SWING CHECK VALFLER

Cast Steel Swing Check Valves Figure V 4010- V 4020-V 4030-V 4040



MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME	
1 GÖVDE Body	Cast Steel
2 GÖVDE RİNGİ Body Ring	Cast Steel
2a GÖVDE RİNG YÜZEYİ Body Ring Face	Stainless Steel
3 DİSK / KLAPE Disc	Cast Steel
4 DİSK YÜZEYİ Disc Face	Stainless Steel
5 MENTEŞE / Disk Kolu Disc Hinge	Cast Steel
6 MİL Hinge Pin	Stainless Steel
7 KÖRTAPA Plug	Carbon Steel
8 CONTA Gasket	Spiral Wound Gasket SWG SS.
9 KAP.SAPLAMALARI Bonnet-Stud Bolt	CrMo Steel
10 KAP.SAPL. SOMUNLARI Bonnet Stud Bolt Nut	Carbon Steel
11 KAPAK Bonnet	Cast Steel
12 İSİM PLAKASI Name Plate	Aluminium

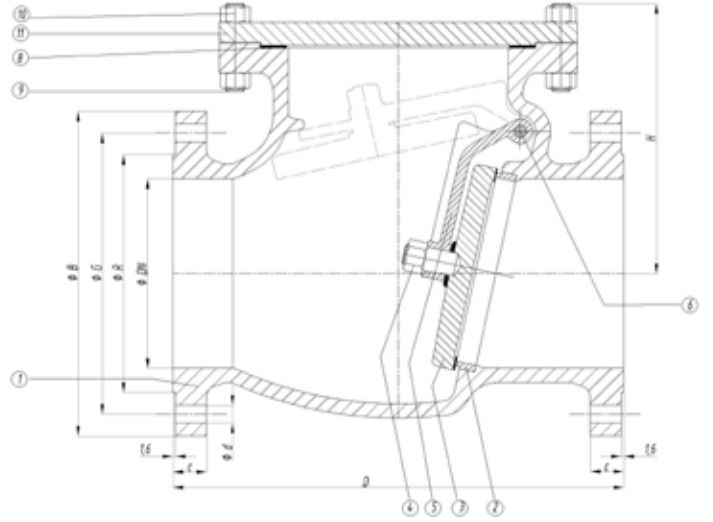

ÖLÇÜ / SIZE	Ø B	C	D	Ø G	Ø R	H*	App.W
inch mm/DN	mm	mm	mm	mm	mm	mm	kg
2 50	152	19,1	203,2	120,6	92	160	18
2 1/2 65	178	22,3	216	139,7	104,8	160	21
3 80	190	23,9	241,3	152,4	127	170	30
4 100	229	23,9	292,1	190,5	157,2	190	44
5 125	254	23,9	330,2	215,9	185,7	240	63
6 150	279	25,4	355,6	241,3	215,9	245	72
8 200	343	28,6	495,3	298,4	269,9	300	131
10 250	406	30,2	622,3	362	323,8	380	220
12 300	483	31,8	698,5	431,8	381	430	280
14 350	533	35,0	787,4	476,2	412,8	430	435
16 400	597	36,6	863,6	539,8	469,9	465	565
18 450	635	39,7	977,9	577,8	533,4	555	720
20 500	699	42,9	977,9	635	584,2	595	850
24 600	813	47,7	1295,4	749,3	692,2	660	1500
32 800	1060,4	55,5	1574,8	977,9	908	880	2285

ÖLÇÜ / SIZE	Ø B	C	D	Ø G	Ø R	H	App.W
inch mm/DN	mm	mm	mm	mm	mm	mm	kg
2 50	165	25,4	292,1	127	92	160	33
2 1/2 65	190	28,4	330,2	149,3	104,8	200	35
3 80	210	31,8	355,6	168,2	127	200	42
4 100	273	38,1	431,8	215,9	157,2	255	85
6 150	356	47,8	558,8	292,1	215,9	340	210
8 200	419	55,6	660,4	349,2	269,9	440	490
10 250	508	63,5	787,4	431,8	323,8	495	520
12 300	559	66,5	838,2	489	381	540	875
14 350	603	69,9	889	527	412,8	590	950
16 400	686	76,2	990,6	603,2	469,9	700	1250

ÖLÇÜ / SIZE	Ø B	C	D	Ø G	Ø R	H	App.W
inch mm/DN	mm	mm	mm	mm	mm	mm	kg
2 50	165	22,4	266,7	127	92	150	22
2 1/2 65	190	25,4	292,1	149,3	104,8	170	25
3 80	210	28,4	317,5	168,2	127	195	45
4 100	254	31,8	355,6	200	157,2	195	63
6 150	318	36,6	444,5	269,8	215,9	280	127
8 200	381	41,1	533,4	330,2	269,9	355	230
10 250	444	47,8	622,3	387,4	323,8	420	295
12 300	521	50,8	711,2	450,8	381	440	472

ÖLÇÜ / SIZE	Ø B	C	D	Ø G	Ø R	H	App.W
inch mm/DN	mm	mm	mm	mm	mm	mm	kg
2 50	216	38,1	368,3	165,1	92	190	55
2 1/2 65	244	41,1	419,1	190,5	104,8	230	70
3 80	241	38,1	381	190,5	127	250	90
4 100	292	44,5	457,2	235	157,2	305	152

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.

Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.