





## ASA 150-ASA 300-ASA 600 DÖVME ÇELİK GATE VALFLER Forged Steel Gate Valves Figure V 2100-V 2101-V 2102

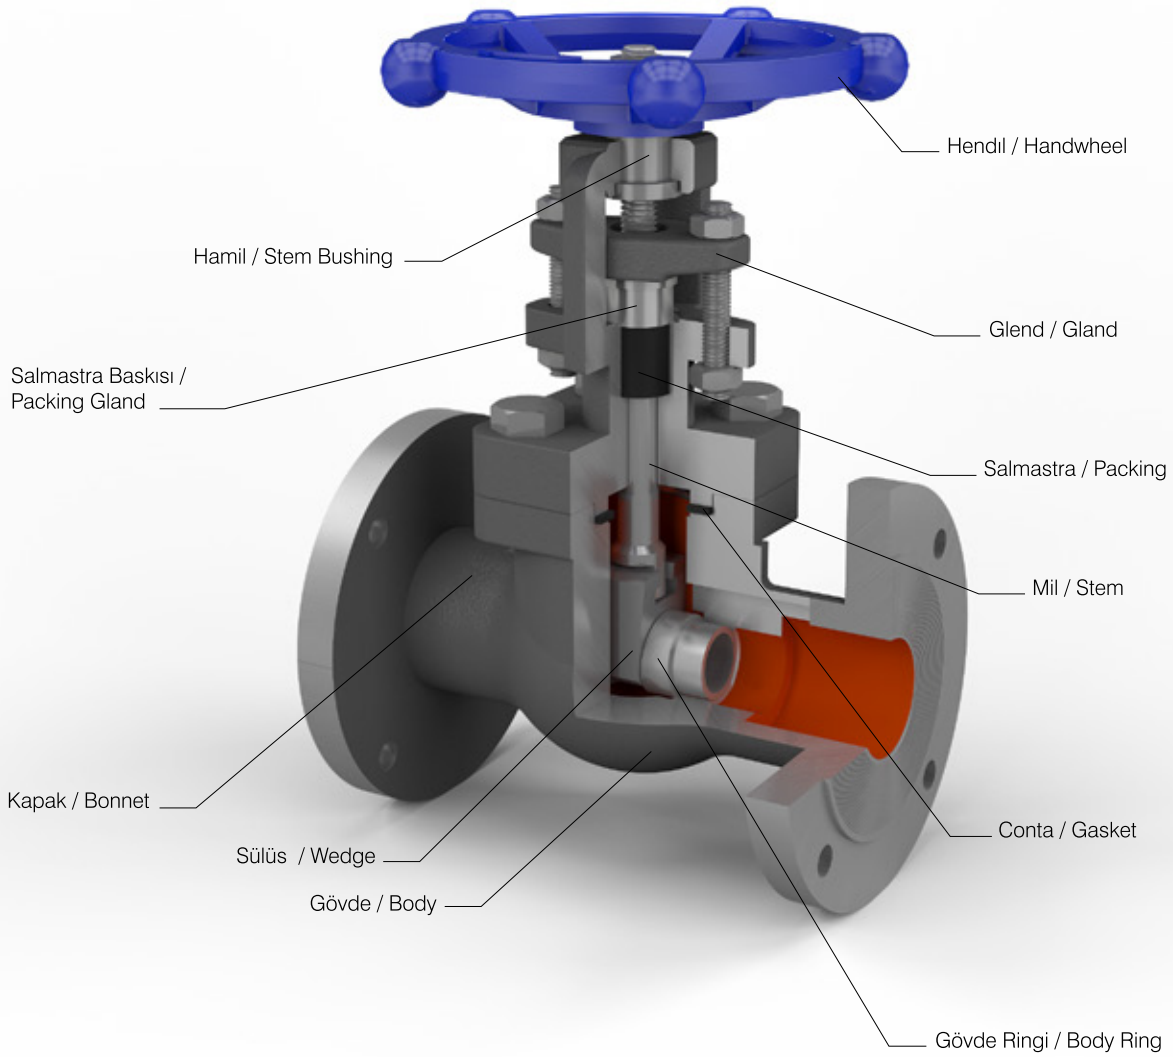

Design standard: API 602  
Face to face standard: ANSI B16.10  
Flange dimensions are according to ANSI B16.5  
Inspection and test standard: API 598&API 602

# ASA 150- ASA 300-ASA 600 DÖVME ÇELİK GATE VALFLER

## Forged Steel Gate Valves Figure V 2100-V 2101-V 2102

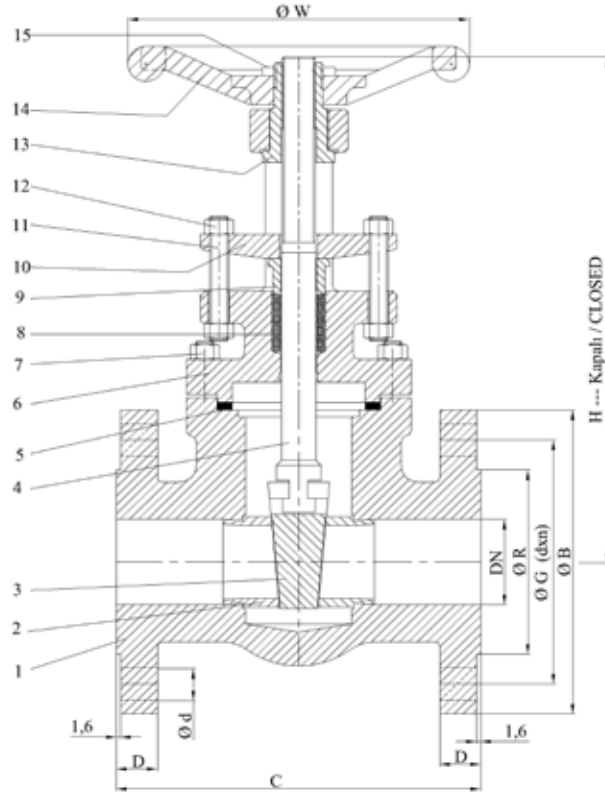

|                       |           |    |       |     |      |      |       |     |     |       |
|-----------------------|-----------|----|-------|-----|------|------|-------|-----|-----|-------|
| ASA 150 Figure V 2100 | ÖLÇÜ/SIZE |    | C     | H   | D    | Ø R  | Ø G   | Ø B | W   | App.W |
|                       | inch      | DN | mm    | mm  | mm   | mm   | mm    | mm  | mm  | kg    |
|                       | 1/2       | 15 | 108   | 134 | 11,2 | 34,9 | 60,3  | 89  | 96  | 2,9   |
|                       | 3/4       | 20 | 117,5 | 143 | 12,7 | 42,9 | 69,8  | 99  | 96  | 3,5   |
|                       | 1         | 25 | 127   | 182 | 14,3 | 50,8 | 79,4  | 108 | 96  | 6     |
|                       | 1 1/4     | 32 | 139,5 | 228 | 15,9 | 63,5 | 88,9  | 117 | 130 | 8,5   |
|                       | 1 1/2     | 40 | 165   | 228 | 17,5 | 73   | 98,4  | 127 | 130 | 11    |
| ASA 300 Figure V 2101 | ÖLÇÜ/SIZE |    | C     | H   | D    | Ø R  | Ø G   | Ø B | W   | App.W |
|                       | inch      | DN | mm    | mm  | mm   | mm   | mm    | mm  | mm  | kg    |
|                       | 1/2       | 15 | 139,5 | 134 | 14,2 | 34,9 | 66,7  | 95  | 96  | 4,5   |
|                       | 3/4       | 20 | 152,5 | 143 | 15,7 | 42,9 | 82,6  | 117 | 96  | 5     |
|                       | 1         | 25 | 165   | 182 | 17,5 | 50,8 | 88,9  | 124 | 96  | 7     |
|                       | 1 1/4     | 32 | 177,8 | 228 | 19   | 63,5 | 98,4  | 133 | 130 | 11    |
|                       | 1 1/2     | 40 | 190,5 | 228 | 20,6 | 73   | 114,3 | 156 | 130 | 12    |
| ASA 600 Figure V 2102 | ÖLÇÜ/SIZE |    | C     | H   | D    | Ø R  | Ø G   | Ø B | W   | App.W |
|                       | inch      | DN | mm    | mm  | mm   | mm   | mm    | mm  | mm  | kg    |
|                       | 1/2       | 15 | 165   | 134 | 14,2 | 34,9 | 66,7  | 95  | 96  | 4,5   |
|                       | 3/4       | 20 | 190,5 | 143 | 15,7 | 42,9 | 82,6  | 117 | 96  | 5,5   |
|                       | 1         | 25 | 216   | 182 | 17,5 | 50,8 | 88,9  | 124 | 96  | 8     |
|                       | 1 1/4     | 32 | 228,5 | 228 | 20,6 | 63,5 | 98,4  | 133 | 130 | 12    |
|                       | 1 1/2     | 40 | 241   | 228 | 22,4 | 73   | 114,3 | 156 | 130 | 14    |
| ASA 600 Figure V 2102 | ÖLÇÜ/SIZE |    | C     | H   | D    | Ø R  | Ø G   | Ø B | W   | App.W |
|                       | inch      | DN | mm    | mm  | mm   | mm   | mm    | mm  | mm  | kg    |
|                       | 1/2       | 15 | 165   | 134 | 14,2 | 34,9 | 66,7  | 95  | 96  | 4,5   |
|                       | 3/4       | 20 | 190,5 | 143 | 15,7 | 42,9 | 82,6  | 117 | 96  | 5,5   |
|                       | 1         | 25 | 216   | 182 | 17,5 | 50,8 | 88,9  | 124 | 96  | 8     |
|                       | 1 1/4     | 32 | 228,5 | 228 | 20,6 | 63,5 | 98,4  | 133 | 130 | 12    |
|                       | 1 1/2     | 40 | 241   | 228 | 22,4 | 73   | 114,3 | 156 | 130 | 14    |
| ASA 600 Figure V 2102 | ÖLÇÜ/SIZE |    | C     | H   | D    | Ø R  | Ø G   | Ø B | W   | App.W |
|                       | inch      | DN | mm    | mm  | mm   | mm   | mm    | mm  | mm  | kg    |
|                       | 1/2       | 15 | 165   | 134 | 14,2 | 34,9 | 66,7  | 95  | 96  | 4,5   |
|                       | 3/4       | 20 | 190,5 | 143 | 15,7 | 42,9 | 82,6  | 117 | 96  | 5,5   |
|                       | 1         | 25 | 216   | 182 | 17,5 | 50,8 | 88,9  | 124 | 96  | 8     |
|                       | 1 1/4     | 32 | 228,5 | 228 | 20,6 | 63,5 | 98,4  | 133 | 130 | 12    |
|                       | 1 1/2     | 40 | 241   | 228 | 22,4 | 73   | 114,3 | 156 | 130 | 14    |