




ASA 800-ASA 1500-ASA 2500 DÖVME ÇELİK GATE VALFLER Forged Steel Gate Valves Figure V 2103-V 2104-V 2105

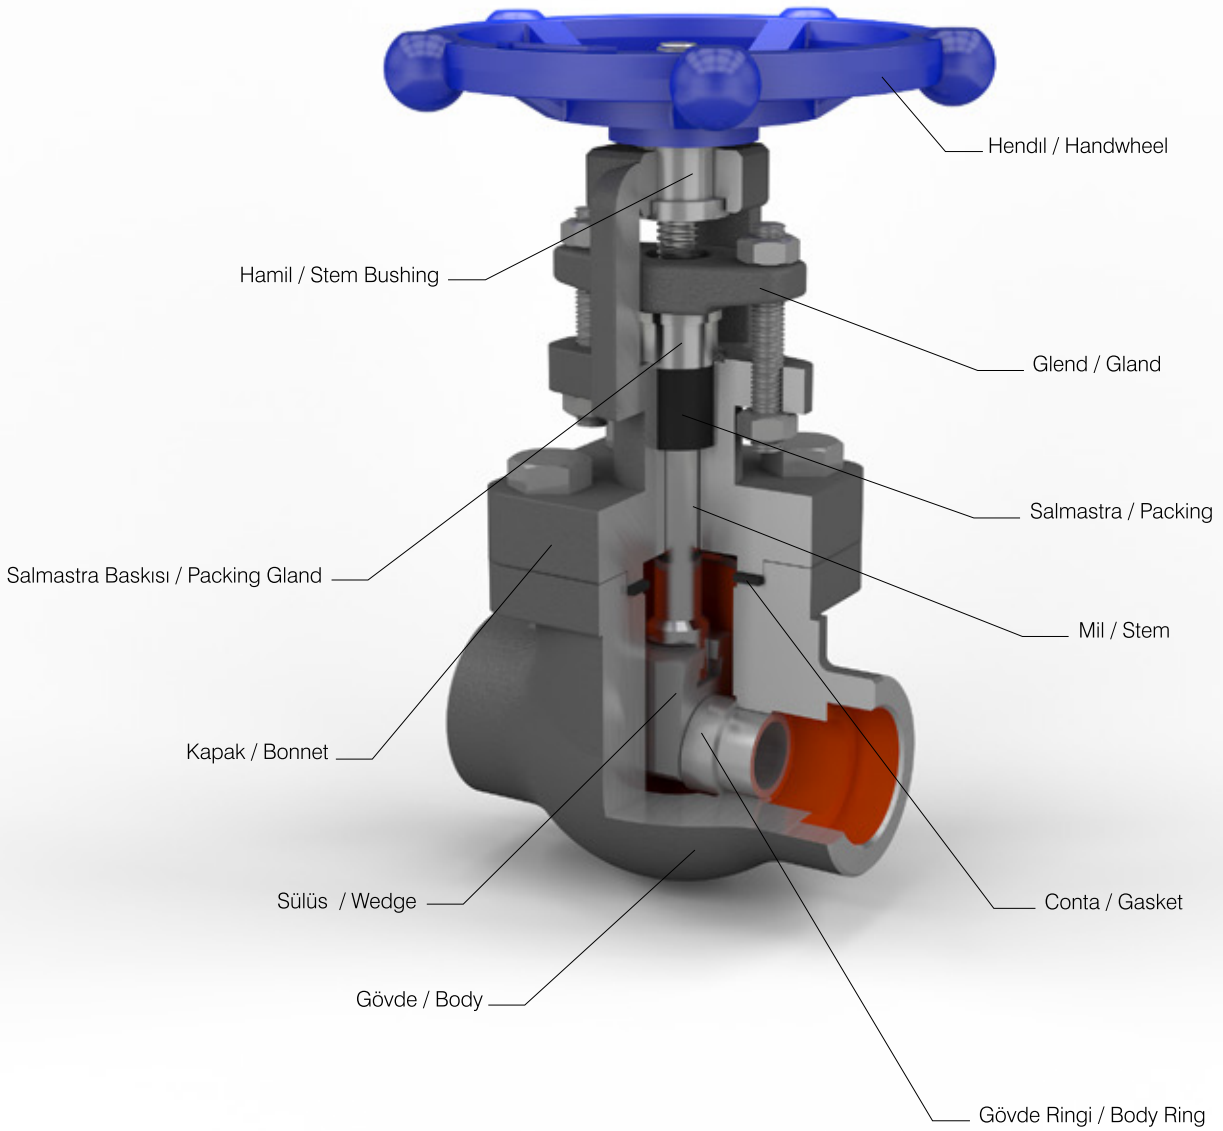

Design standard: API 602
Screwed ends are according to ANSI B 2.1
Socket weld ends are according to ANSI B 16.11
Inspection and test standard: API 598&API 602


ASA 800-ASA 1500-ASA 2500 DÖVME ÇELİK GATE VALFLER

Forged Steel Gate Valves Figure V 2103-V 2104-V 2105



MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME	
1 GÖVDE Body	Forged Steel
2 GÖVDE RİNGİ Body Ring	Stainless Steel
3 SÜLÜS Wedge	Stainless Steel
4 MİL Stem	Stainless Steel
5 CONTA Gasket	Spiral Wound Gasket
6 KAPAK Bonnet	Forged Steel
7 KAPAK CİVATASI Bonnet Bolt	Cr Mo Steel
8 SALMASTRA Packing	Graphite
9 S.ALM. BASKISI Packing Gland	Stainless Steel
10 GLEND Gland	Forged Steel
11 GLEND SAPLAMASI Gland Bolt	Stainless Steel
12 SOMUN Nut	Carbon Steel (Galvanized)
13 HAMİL (MİL BURCU) Stem Bushing	Stainless Steel
14 HENDİL Handwheel	Ductile Iron
15 HENDİL SOMUNU Handwheel Nut	Carbon Steel (Galvanized)
16 İSİM PLAKASI Name Plate	Aluminium

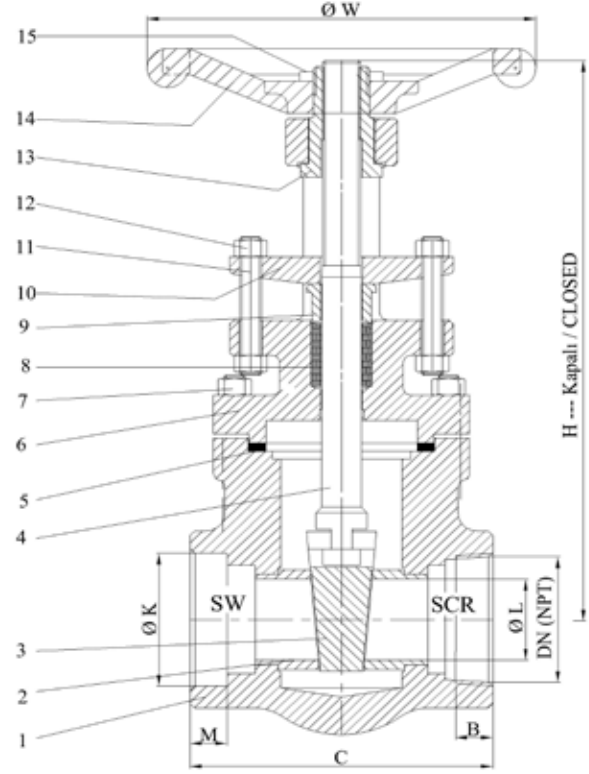

ASA 800 Figure V 2103	ÖLÇÜ/SIZE		DN	Ø K	C	Ø L	H	B	M	W	App.W
	inch	mm	NPT	mm	mm	mm	mm	Min	min	mm	kg
	1/2	15	1/2	22	84	9,5	134	13,5	10	96	2,2
	3/4	20	3/4	27,5	90,5	12,8	143	14	13	96	2,3
	1	25	1	34	114	17,5	182	17,5	13	96	3,7
	1 1/2	40	1 1/2	49	120,5	28,5	228	18,5	15	130	6,2
	2	50	2	61,3	130	36,5	260	19	16	150	11

ASA 1500 Figure V 2104	ÖLÇÜ/SIZE		DN	Ø K	C	Ø L	H	B	M	W	App.W
	inch	mm	NPT	mm	mm	mm	mm	Min	min	mm	kg
	1/2	15	1/2	22	111	12	190	13,5	10	96	2,5
	3/4	20	3/4	27,5	111	12,8	169	14	13	96	3,9
	1	25	1	34	120	17,5	215	17,5	15	130	6,2
	1 1/4	32	1 1/4	43	130	26	270	18,5	15	130	6,5
	1 1/2	40	1 1/2	49	130	26	270	18,5	15	150	9

ASA 2500 Figure V 2105	ÖLÇÜ/SIZE		DN	Ø K	C	Ø L	H	B	M	W	App.W
	inch	mm	NPT	mm	mm	mm	mm	Min	min	mm	kg
	3/4	20	3/4	27,5	120	12,8	215	14	13	130	6,2
	1	25	1	34	130	17,5	275	17,5	13	130	9,1

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.

Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.