




ASA 150 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2010

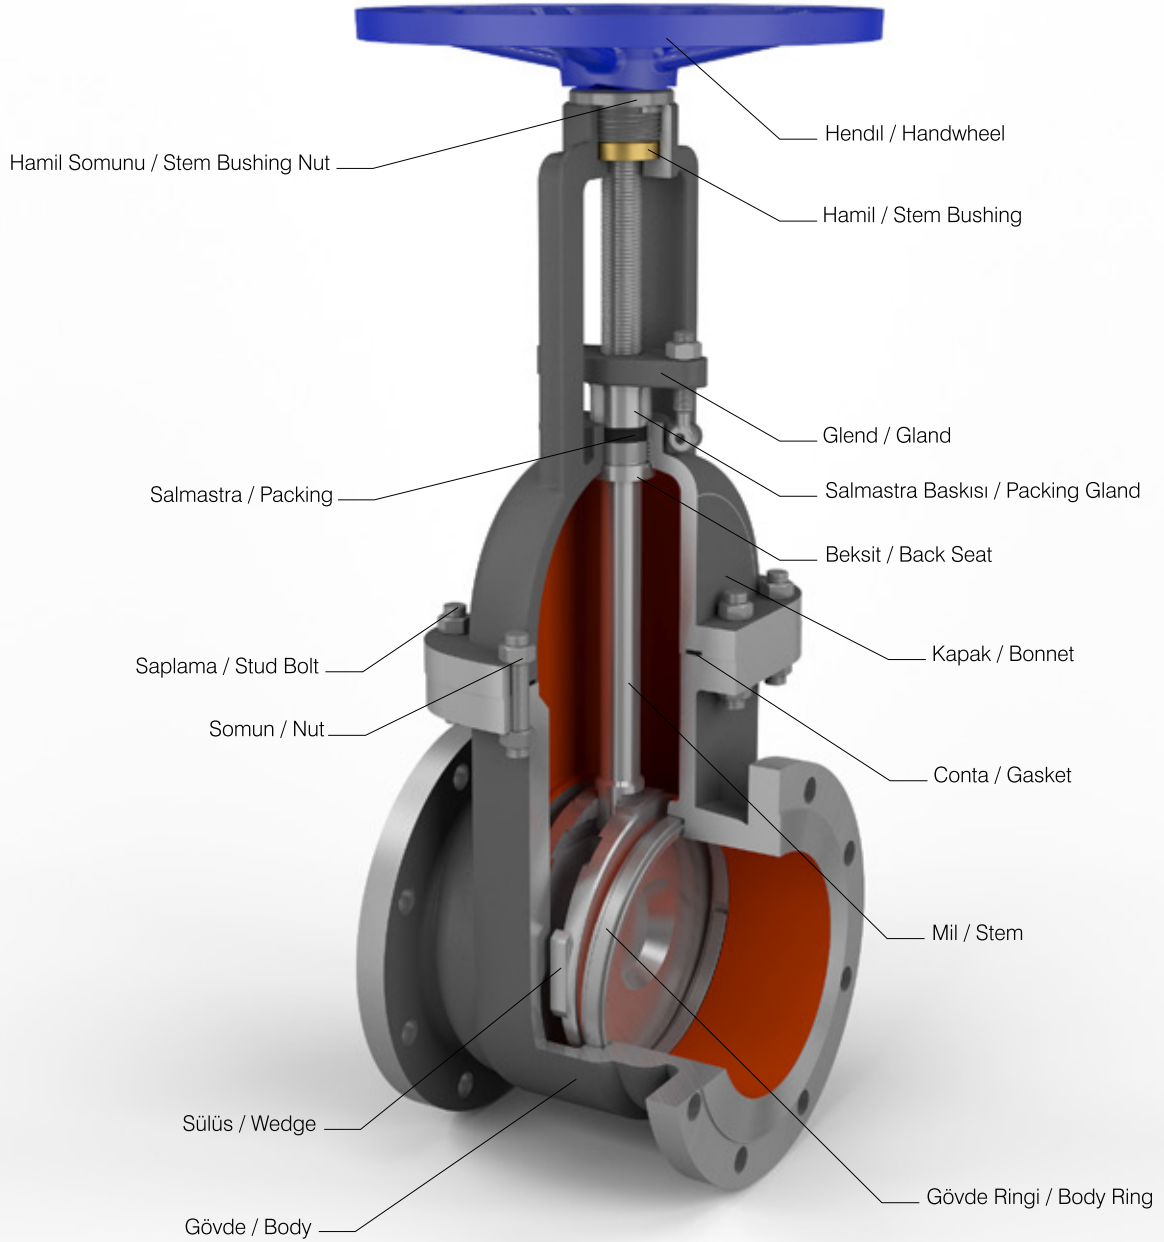

Design standard: API 6D&API 600&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D, API 600
Operating pressure-temperatures are according to ASME B16.34


ASA 150 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2010



MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME	
1 GÖVDE Body	Cast Steel
2 GÖVDE RİNGİ Body Ring	Carbon Steel
2a GÖVDE RİNGİ YÜZEYİ Body Ring Face	Stainless Steel
3 SÜLÜS Wedge	Cast Steel
3a SÜLÜS YÜZEYİ Wedge Seat Face	Stainless Steel
4 MİL Stem	Stainless Steel
5 CONTA ASA 150 Gasket ASA 300 / 600	Graphite SS Spiral Wound Gasket (SWG)
6 BEKSİT RİNGİ Back Seat Ring	Stainless Steel
7 SALMASTRA Packing	Graphite
8 KAPAK Bonnet	Cast Steel
9 KAP. SAPLAMALARI Bonnet Stud - Bolt	CrMo Steel
10 KAP.SAPL. SOMUNLARI Bonnet Bolt Nut	Carbon Steel
11 SALMASTRA BASKISI Packing Gland	Stainless Steel
12 GLEND Gland	Carbon Steel
13 GLEND SAPLAMASI Gland Bolt	Cast Steel
14 GLEND SAP. SOMUNU Gland Bolt Nut	Cast Steel
15 KAPAK ÇATALI Yoke	Carbon Steel
16 HAMİL (Mil Burcu) Stem Bushing	Bronze
17 HAMİL SOMUNU Bushing Nut	Carbon Steel
18 HENDİL Handwheel	Ductile Iron
19 HENDİL SOMUNU Handwheel Nut	Carbon Steel
20 GRESÖRLÜK Grease Fitting	Carbon Steel
21 İSİM PLAKASI Name Plate	Aluminium

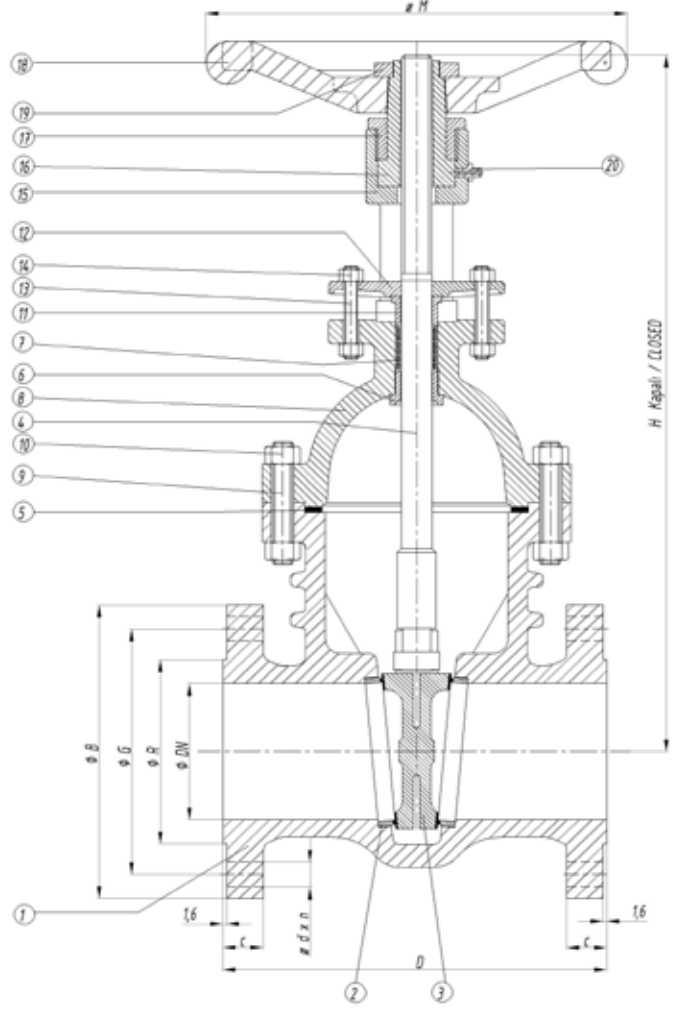

ASA 150 Figure V 2010	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø dxn	D	H	Ø M	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	152,4	120,6	92	19,1	19 x 4	177,8	345	200	19
	2 1/2	65	177,8	139,7	104,8	22,3	19 x 4	190,5	350	200	26
	3	80	190,5	152,4	127	23,9	19 x 4	203,2	415	230	36
	4	100	228,6	190,5	157,2	23,9	19 x 8	228,6	470	250	51
	5	125	254	215,9	185,7	23,9	22,2 x 8	254	550	300	75
	6	150	279,4	241,3	215,9	25,4	22,2 x 8	266,7	575	300	77
	8	200	342,9	298,4	269,9	28,6	22,2 x 8	292,1	740	350	112
	10	250	406,4	362	323,8	30,2	25,4 x 12	330,2	910	400	178
	12	300	482,6	431,8	381	31,8	25,4 x 12	355,6	1040	500	335
	14	350	533,4	476,2	412,8	35	28,5 x 12	381	1160	500	520
	16	400	596,9	539,8	469,9	36,6	28,5 x 16	406,4	1370	600	550
	18	450	635	577,8	533,4	39,7	31,8 x 16	431,8	1475	700	770
	20	500	698,5	635	584,2	42,9	31,8 x 20	457,2	1650	700	900
	24	600	812,8	749,3	692,2	47,7	35 x 20	508	2120	800	1250
	26	650	870	806,4	749,3	68,3	35 x 24	558,8	2305	800	1800
	28	700	927,1	863,6	800	71,4	35 x 28	610	2540	800	2150
	30	750	984,2	914,4	857,2	74,7	35 x 28	610	2590	800	2700
	32	800	1060,4	977,9	914,4	57,1	41,1 x 28	711,2	2800	800	2420
	36	900	1168,4	1085,8	1022,3	90,4	41,1 x 32	711,2	3080	800	3200

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.

Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.