




ASA 300 DÖKÜM ÇELİK GATE VALFLER


Cast Steel Gate Valves Figure V 2020

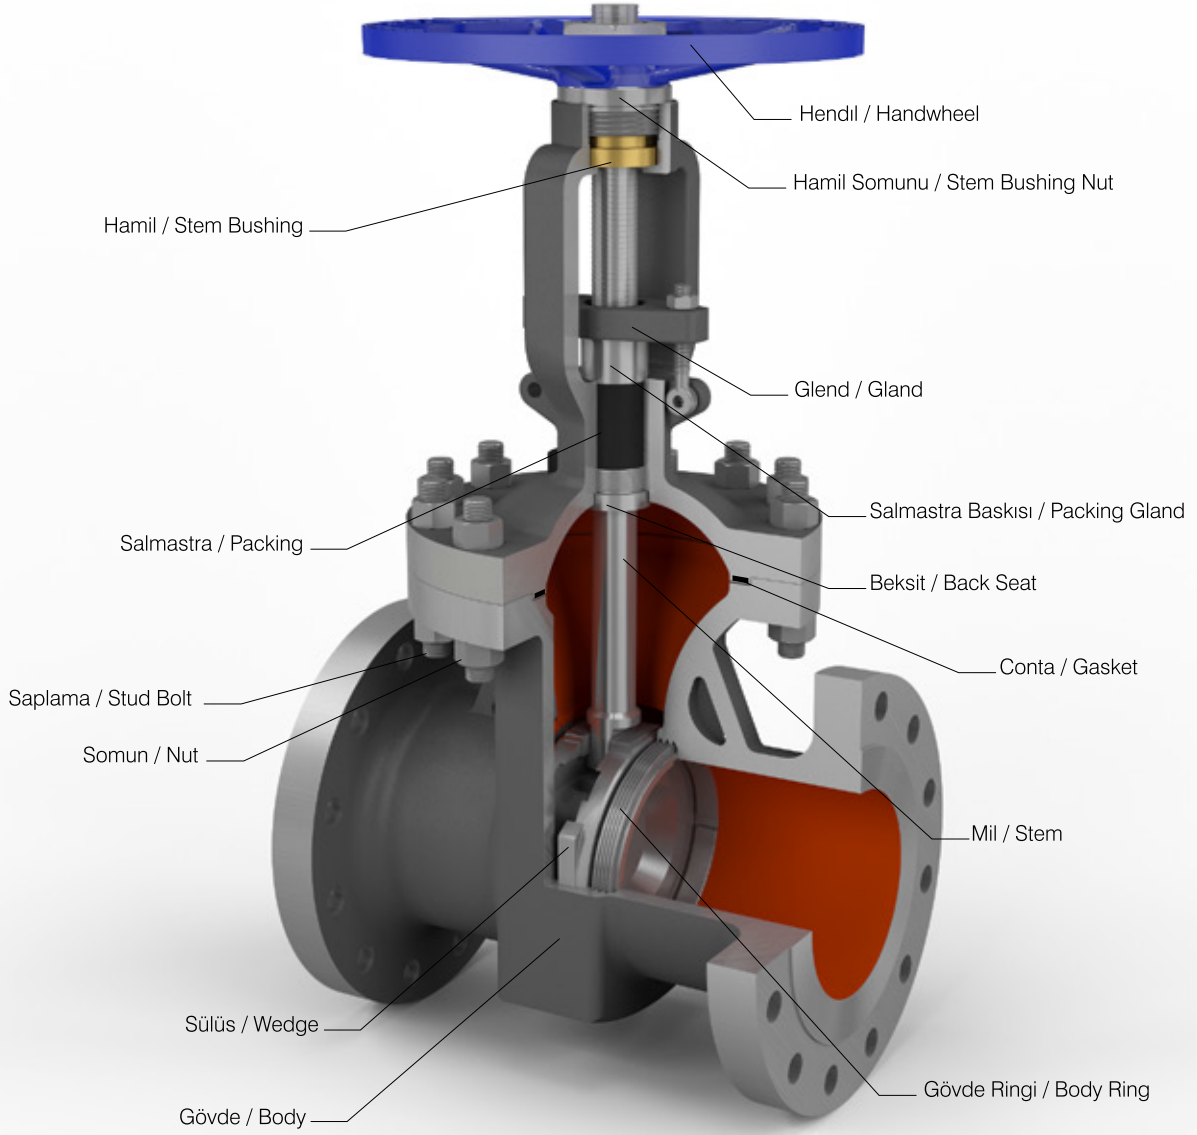

Design standard: API 6D&API 600&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D, API 600
Operating pressure-temperatures are according to ASME B16.34

ASA 300 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2020

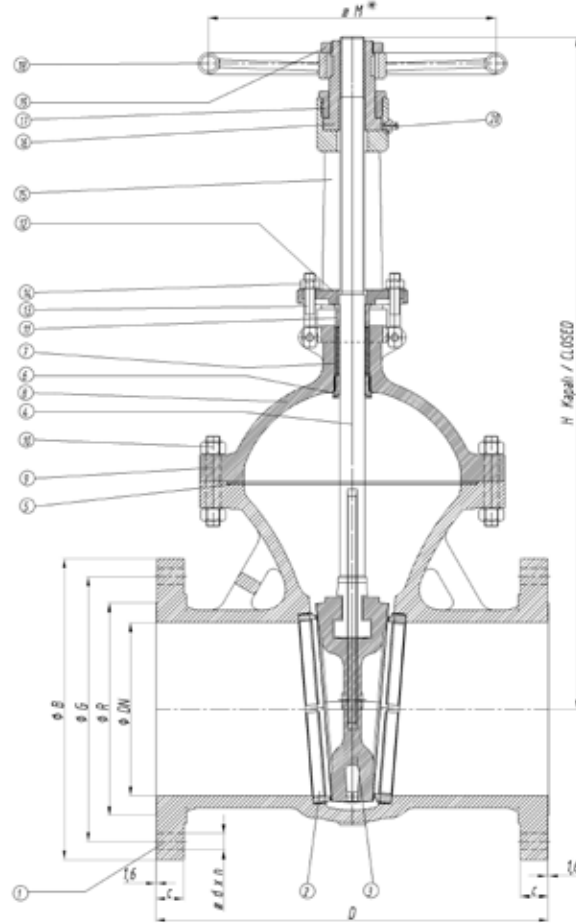

ASA 300 Figure V 2020	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø dxn	D	H	Ø M	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	165,1	127	92	22,4	19 x 8	215,9	345	200	25
	2 1/2	65	190,5	149,3	104,8	25,4	22,2 x 8	241,3	410	230	28
	3	80	209,6	168,3	127	28,4	22,2 x 8	282,6	410	230	55
	4	100	254	200	157,2	31,8	22,2 x 8	304,8	445	250	64
	5	125	279,4	235	185,7	35	22,2 x 8	381	585	300	100
	6	150	317,5	269,8	215,9	36,6	22,2 x 12	403,2	620	350	165
	8	200	381	330,2	269,9	41,1	25,4 x 12	419,1	810	400	205
	10	250	444,5	387,4	323,8	47,8	28,5 x 16	457,2	970	500	374
	12	300	520,7	450,8	381	50,8	31,8 x 16	501,7	1100	500	454
	14	35	584,2	514,4	412,8	53,8	31,8 x 20	762	1305	600	880
	16	400	647,7	571,5	469,9	57,2	35 x 20	838,2	1620	700	1120
	18	450	711,2	628,6	533,4	60,5	35 x 24	914,4	1640	700	1365
	20	500	774,7	685,8	584,2	63,5	35 x 24	990,6	1910	700	1850
	24	600	914,4	812,8	692,2	69,9	41,1 x 24	1143	2125	800	2000

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.
Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.