




ASA 600 DÖKÜM ÇELİK GATE VALFLER


Cast Steel Gate Valves Figure V 2030

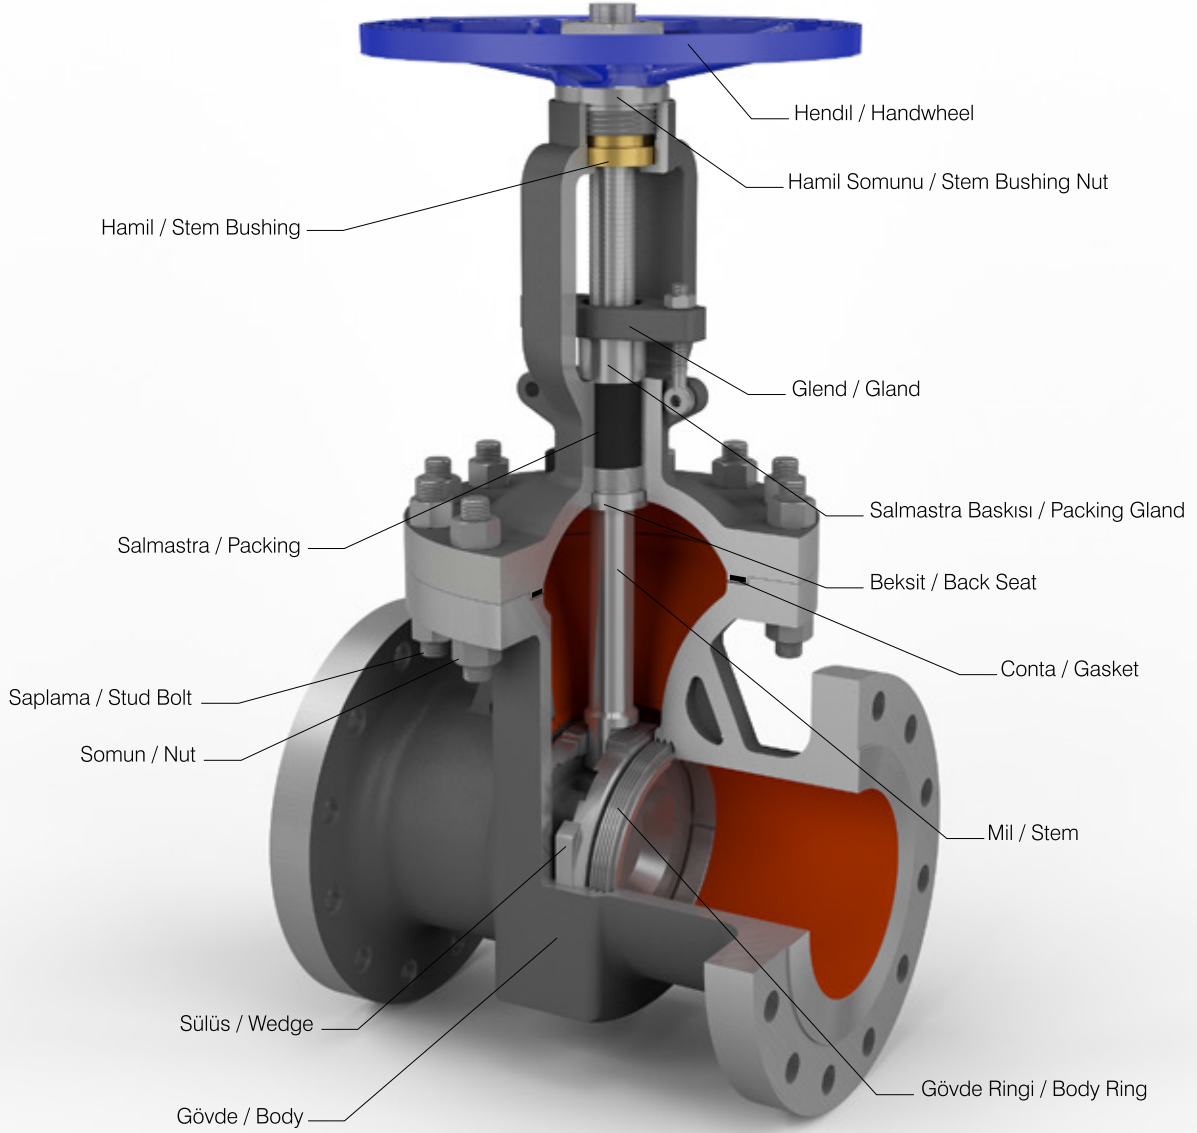

Design standard: API 6D&API 600&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D, API 600
Operating pressure-temperatures are according to ASME B16.34

ASA 600 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2030

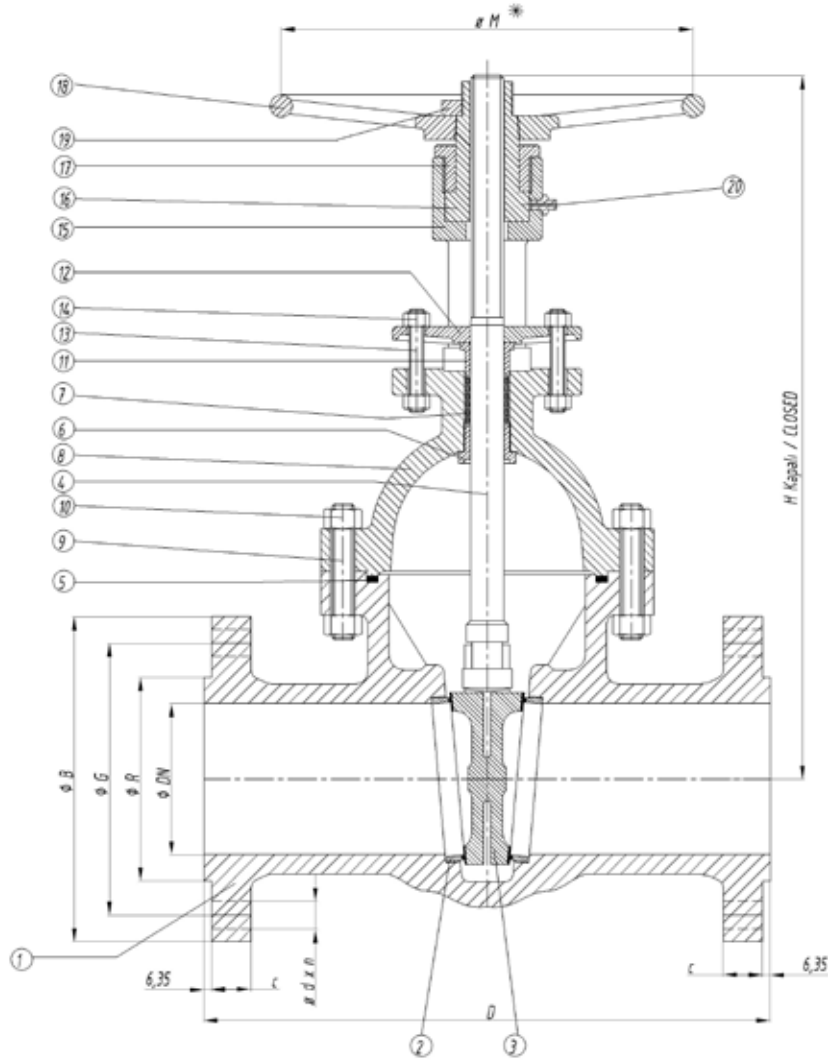

ASA 600 Figure V 2030	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	H	Ø M	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	165,1	127	92	25,4	19 x 8	292,1	375	200	36
	2 1/2	65	190,5	149,3	104,8	28,4	22,2 x 8	330,2	415	230	42
	3	80	209,6	168,3	127	31,8	22,2 x 8	355,6	455	250	75
	4	100	273	215,9	157,2	38,1	25,4 x 8	431,8	555	350	123
	6	150	355,6	292,1	215,9	47,8	28,5 x 12	558,8	800	500	290
	8	200	419,1	349,2	269,9	55,6	31,8 x 12	660,4	930	600	420
	10	250	508	431,8	323,8	63,5	35 x 16	787,4	1125	800	700
	12	300	558,8	489	381	66,5	35 x 20	838,2	1400	800	1020
	14	35	603,3	527	412,8	69,9	38,1 x 20	889	1570	800	1450
	16	400	685,8	603,2	469,9	76,2	41,1 x 20	990,6	1625	800	1820
	18	450	743	654	533,4	82,6	44,5 x 20	1092,2	2250	1000	1990
	20	500	812,8	723,9	584,2	88,9	44,5 x 24	1193,8	2400	1400	2410
	24	600	939,8	838,2	692,2	101,6	50,8 x 24	1397	3000	1500	3990

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.
Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.