




ASA 900-ASA1500 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2040-V 2050

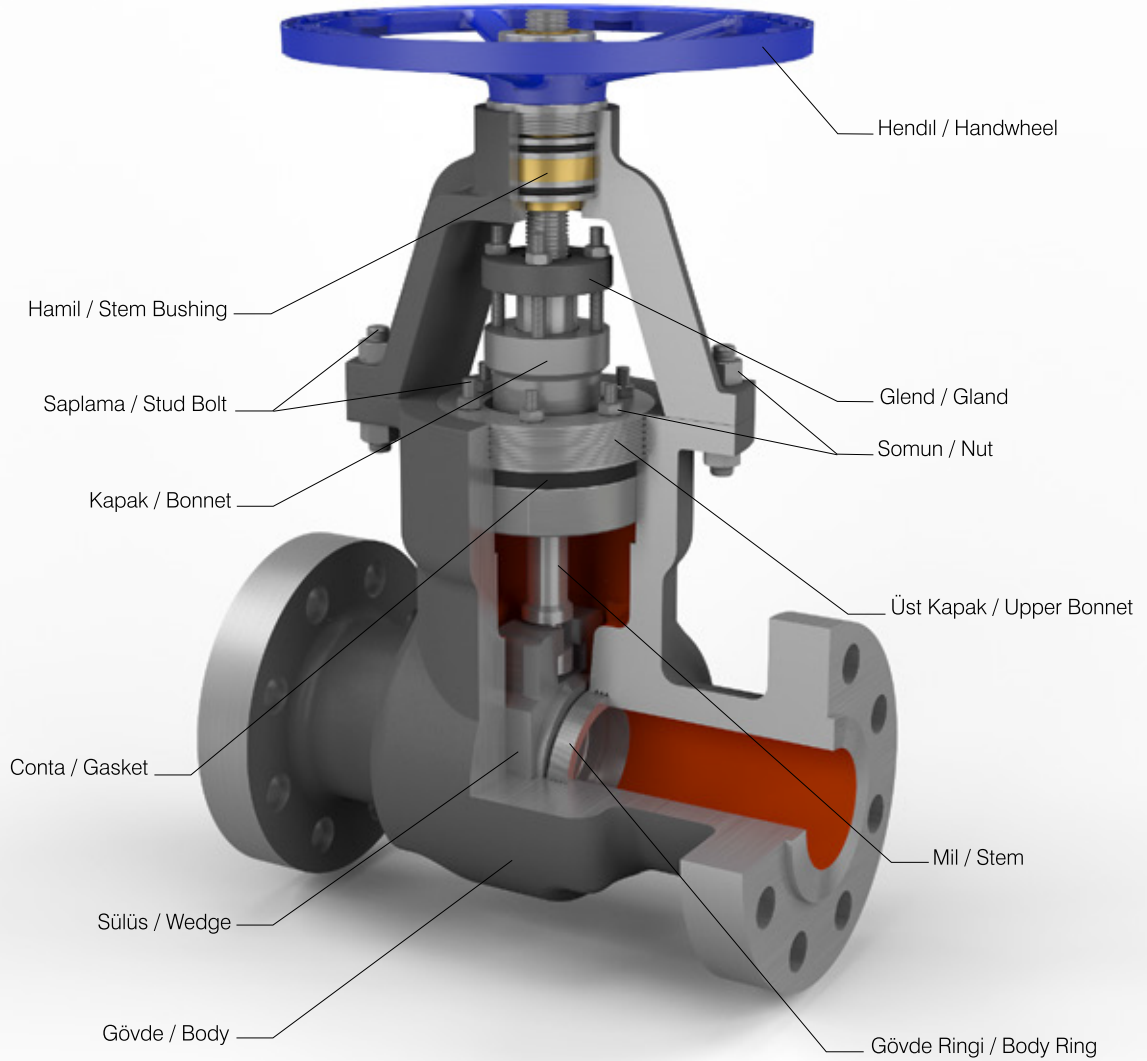

Design standard: API 6D&API 600&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D, API 600
Operating pressure-temperatures are according to ASME B16.34


ASA 900-ASA1500 DÖKÜM ÇELİK GATE VALFLER

Cast Steel Gate Valves Figure V 2040-V 2050



MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME	
1 GÖVDE Body	Cast Steel
2 GÖVDE RİNGİ Body Ring	Carbon Steel
2a GÖVDE RİNG YÜZEYİ Body Ring Face	Stainless Steel
3 SÜRGÜ Wedge	Cast Steel
3a SÜLÜS YÜZEYİ Wedge Seat Face	Stainless Steel
4 MİL Stem	Stainless Steel
5 BEKSİT RİNGİ Back Seat	Stainless Steel
6 KAPAK (Glend Çektirmesi) Bonnet	Cast Steel
7 CONTA Gasket	Stainless Steel
8 ÜST KAPAK Bonnet (Top)	Carbon Steel
9 SALMASTRA Packing	Graphite
10 SALMASTRA BASKISI Packing Gland	Stainless Steel
11 GLEND Gland	Carbon Steel
12 KAPAK ÇATALI Yoke	Cast Steel
13 ÇATAL SAPLAMALARI Yoke Stud Bolt	Cr Mo Steel
14 SAPL. SOMUNU Stud Bolt Nut	Carbon Steel
15 HAMIL (MİL Burcu) Stem Bushing	Bronze
16 HAMIL SOMUNU Bushing Nut	Steel
17 HENDİL Handwheel	Ductile Iron
18 HENDİL SOMUNU Handwheel Nut	Steel
19 İSİM PLAKASI Name Plate	Aluminium

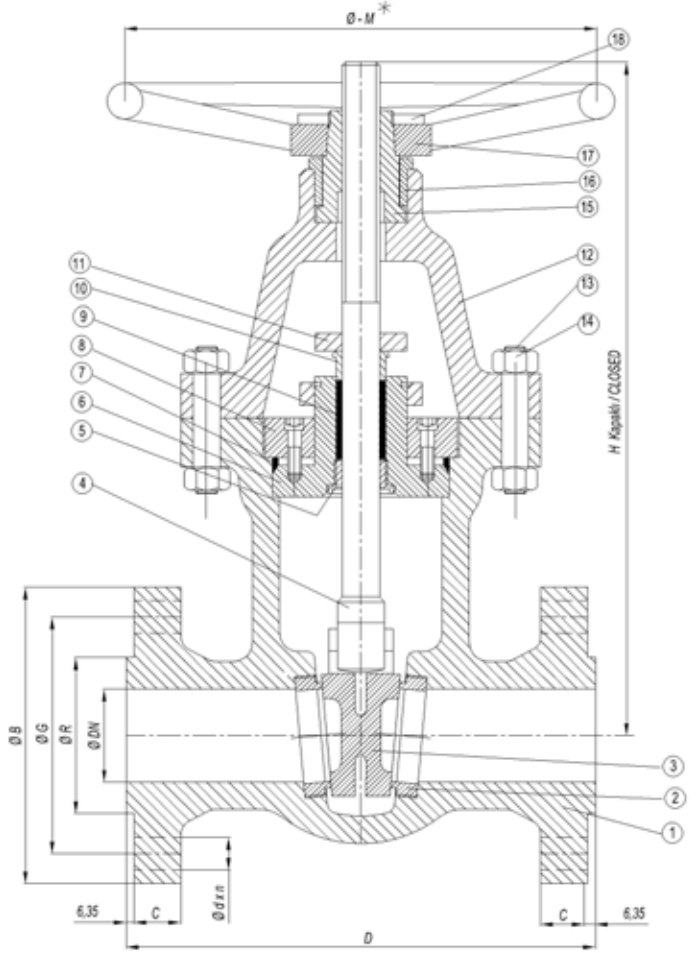

ASA 900 Figure V 2040	ÖLÇÜ / SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	H	Ø M	App. W
	DN	inch	mm	mm	mm	mm	mm	mm	mm	mm	kg
	50	2	215,9	165,1	92	38,1	25,4 x 8	368,3	450	300	85
	65	2 1/2	244,4	190,5	104,8	41,1	28,5 x 8	419,1	500	300	90
	80	3	241,3	190,5	127	38,1	25,4 x 8	381	530	350	105
	100	4	292,1	235	157,2	44,5	31,8 x 8	457,2	690	400	200
	150	6	381	317,5	215,9	55,6	31,8 x 12	609,6	1100	500	450
	200	8	470	393,7	269,9	63,5	38,1 x 12	736,6	1130	600	630
	250	10	546,1	469,9	323,8	69,9	38,1 x 16	838,2	1255	680	950
	300	12	609,6	533,4	381	79,2	38,1 x 20	965,2	1300	780	1225

ASA 1500 Figure V 2050	ÖLÇÜ / SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	H	Ø M	App. W
	DN	inch	mm	mm	mm	mm	mm	mm	mm	mm	kg
	50	2	215,9	165,1	92	38,1	25,4 x 8	368,3	550	300	75
	65	2 1/2	244,4	190,5	104,8	41,1	28,5 x 8	419,1	500	300	92
	80	3	266,7	203,2	127	47,8	31,8 x 8	470	560	350	135
	100	4	311,1	241,3	157,2	53,8	35 x 8	546,1	640	500	204
	150	6	393,7	317,5	215,9	82,6	38,1 x 12	704,9	900	600	450
	200	8	482,6	393,7	269,9	91,9	44,5 x 12	831,9	1130	685	750
	250	10	584,2	482,6	323,8	108	50,8 x 12	990,6	1240	900	1200
	300	12	673,1	571,5	381	124	53,8 x 16	1130,3	1385	1100	2060

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.

Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.