





ASA 600-ASA 900 DÖKÜM ÇELİK TRUNNION KÜRE VALFLER Cast Steel Trunnion Ball Valves Figure V 5030-V 5040

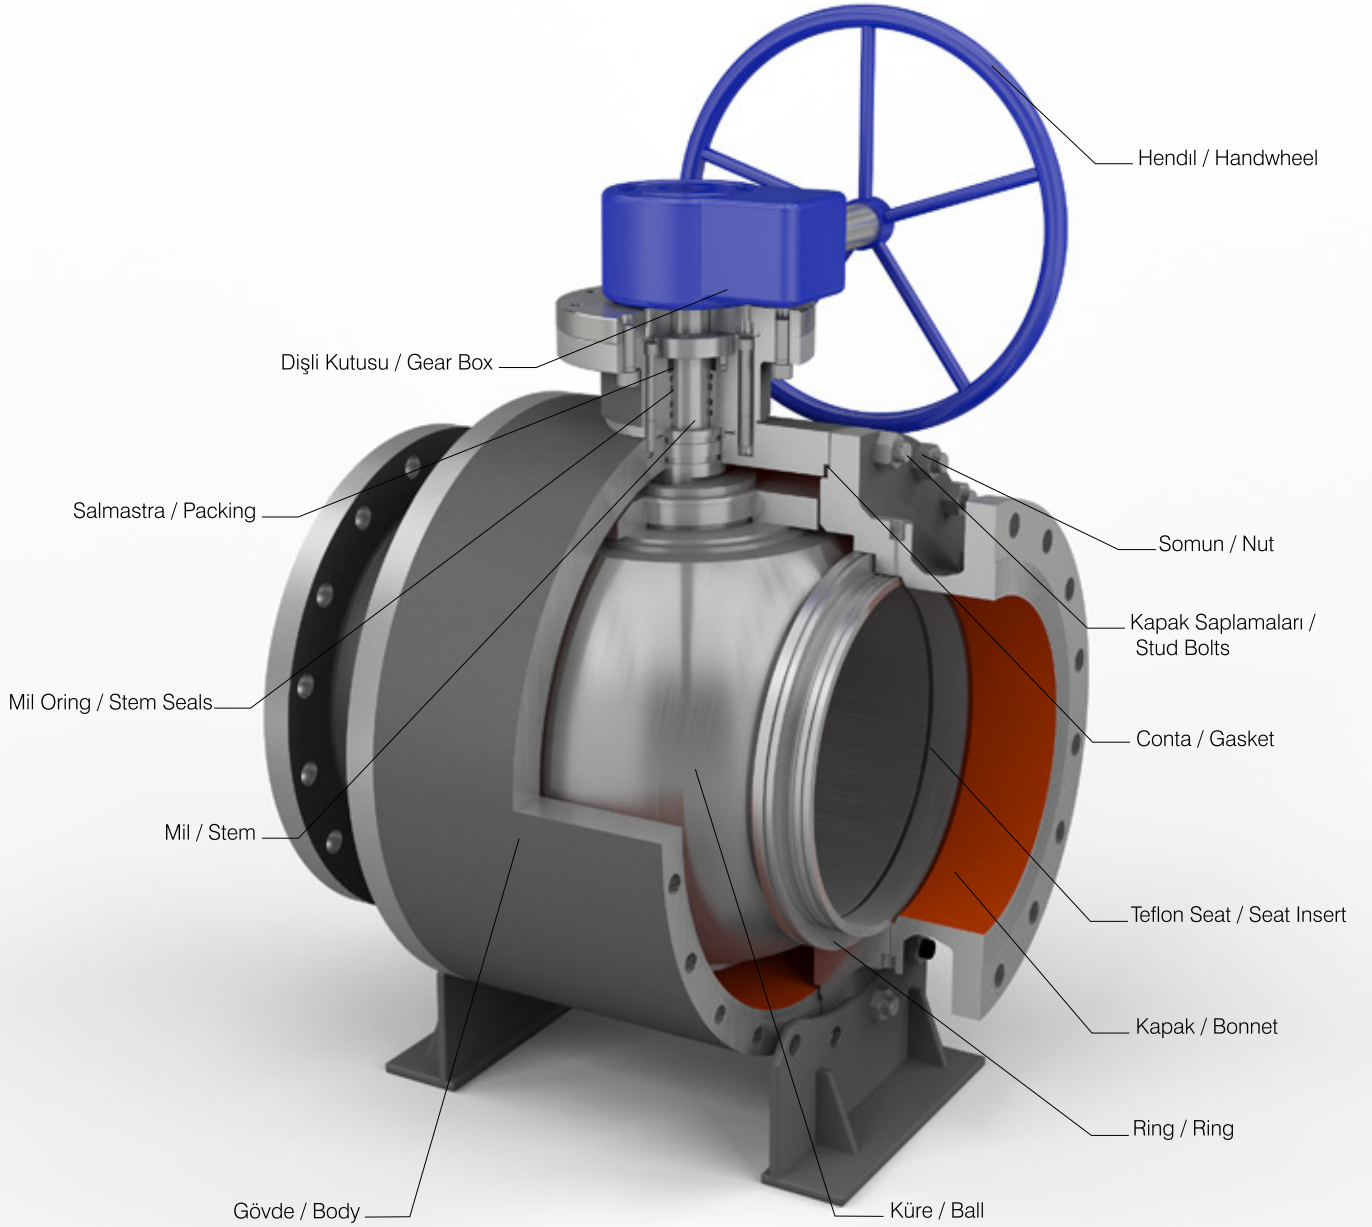

Design standard: API 6D&API 608&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598, API 6D

ASA 600-ASA 900 DÖKÜM ÇELİK TRUNNION KÜRE VALFLER

Cast Steel Trunnion Ball Valves Figure V 5030-V 5040

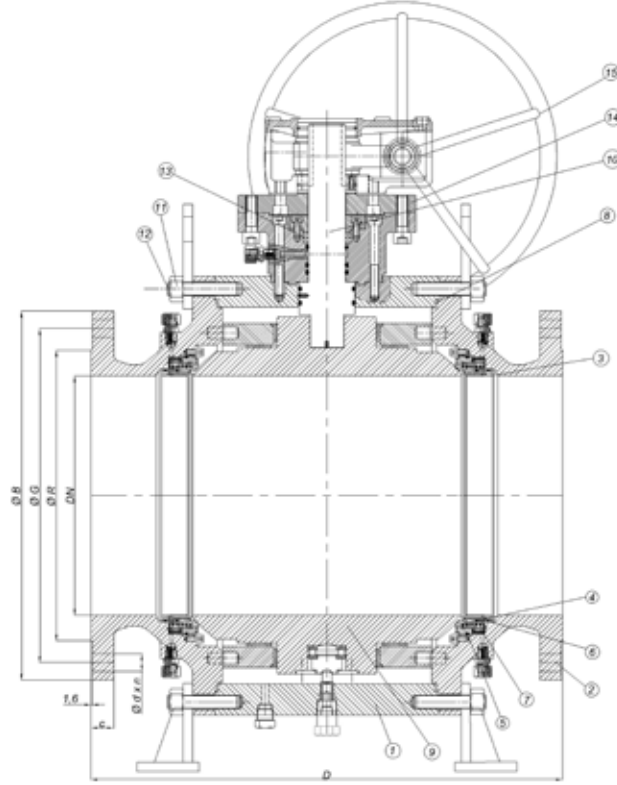

ASA 600 Figure V 5030	ÖLÇÜ / SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	App.W
	inch	DN	mm	mm	mm	mm	mm	mm	kg
	2	50	165,1	127	92	25,4	19 x 8	292,1	32
	2 1/2	65	190,5	149,3	104,8	28,4	22,2 x 8	330,2	46
	3	80	209,6	168,3	127	31,8	22,2 x 8	355,6	54
	4	100	273	215,9	157,2	38,1	25,4 x 8	431,8	93
	6	150	355,6	292,1	215,9	47,8	28,5 x 12	558,8	250
	8	200	419,1	349,2	269,9	55,6	31,8 x 12	660,4	475
	10	250	508	431,8	323,8	63,5	35 x 16	787,4	720
	16	400	685,8	603,2	469,9	76,2	41,1 x 20	990,6	2425
	20	500	812,8	723,9	584,2	88,9	44,5 x 24	1193,8	4490
	28	700	1073	965,2	860	112,5	54 x 28	1549,4	10300

ASA 900 Figure V 5040	ÖLÇÜ / SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	App.W
	inch	DN	mm	mm	mm	mm	mm	mm	kg
	2	50	215,9	165,1	92	38,1	25,4 x 8	368,3	57
	2 1/2	65	244,4	190,5	104,8	41,1	28,5 x 8	419,1	63
	3	80	241,3	190,5	127	38,1	25,4 x 8	381	75
	4	100	292,1	235	157,2	44,5	31,8 x 8	457,2	140
	6	150	381	317,5	215,9	55,6	31,8 x 12	609,6	315
	8	200	470	393,7	269,9	63,5	38,1 x 12	736,6	670
	10	250	546,1	469,9	323,8	69,9	38,1 x 16	838,2	1030
	12	300	609,6	533,4	381	79,2	38,1 x 20	965,2	1560
	16	400	705	616	524	90	45 x 20	1130,3	2470

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.
Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.