




ASA 600 DÖKÜM ÇELİK YAĞLAMALI TİP PLUG VALFLER

Cast Steel Lubricated Type Plug Valves Figure V 6030

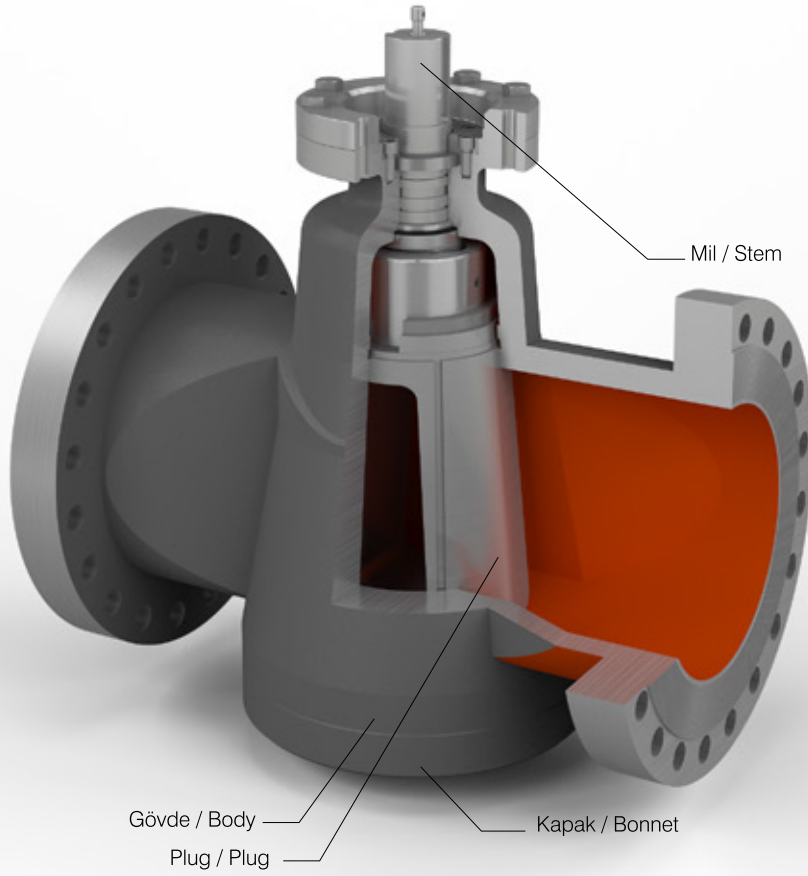

Design standard: API 6D&API 599&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598&API 6D


ASA 600 DÖKÜM ÇELİK YAĞLAMALI TİP PLUG VALFLER

Cast Steel Lubricated Type Plug Valves Figure V 6030



MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME		
1 GÖVDE Body	Cast Steel	
2 PLUG Plug	Cast Steel	
3 MİL Stem	Stainless Steel	
4 CHECK VALF Check Valve	Stainless Steel	
5 SALMASTRA Packing	Graphite	
6 SALMASTRA BASKISI Packing Glend	Stainless Steel	
7 KAPAK Bonnet	Cast Steel	
8 KAP. SAPLAMALARI Bonnet Stud Bolt	CrMo Steel	
9 SIVIÇ Stop Washer	Carbon Steel	
10 CONTA Gasket	Spiral Wound Gasket	
11 KÜRE Ball	Stainless Steel	
12 ALT KAPAK Lower Bonnet	Carbon Steel	
13 KAP. SAPLAMALARI Bonnet Stud Bolt	CrMo Steel	
14 BASINÇ VİDASI Pressure Screw	Carbon Steel	

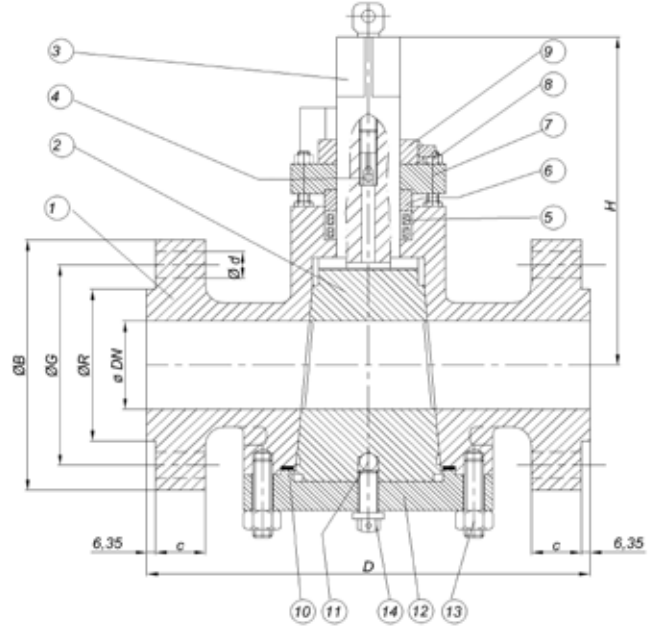

ASA 600 Figure V 6030	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	Ø d	C	D	H	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	Regular&Venturi Pattern	kg
	2	50	165	127	92,1	19	25,4	292	128	28
	3	80	210	168,3	127	22,2	31,8	355,6	140	56
	4	100	273	215,9	157,2	25,4	38,1	431,8	196	95
	6	150	356	292,1	215,9	28,5	47,8	558,8	271	215
	8	200	419	349,2	269,9	38,1	55,6	660,4	324	290
	10	250	508	431,8	323,8	35	63,5	787,4	417	495
	12	300	559	489	381	35	66,5	838,2	493	628
	14	350	603	527	412,8	38,1	69,9	889	594	868
	16	400	686	603,2	469,9	41,1	76,2	990,6	2900	1300