




DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves

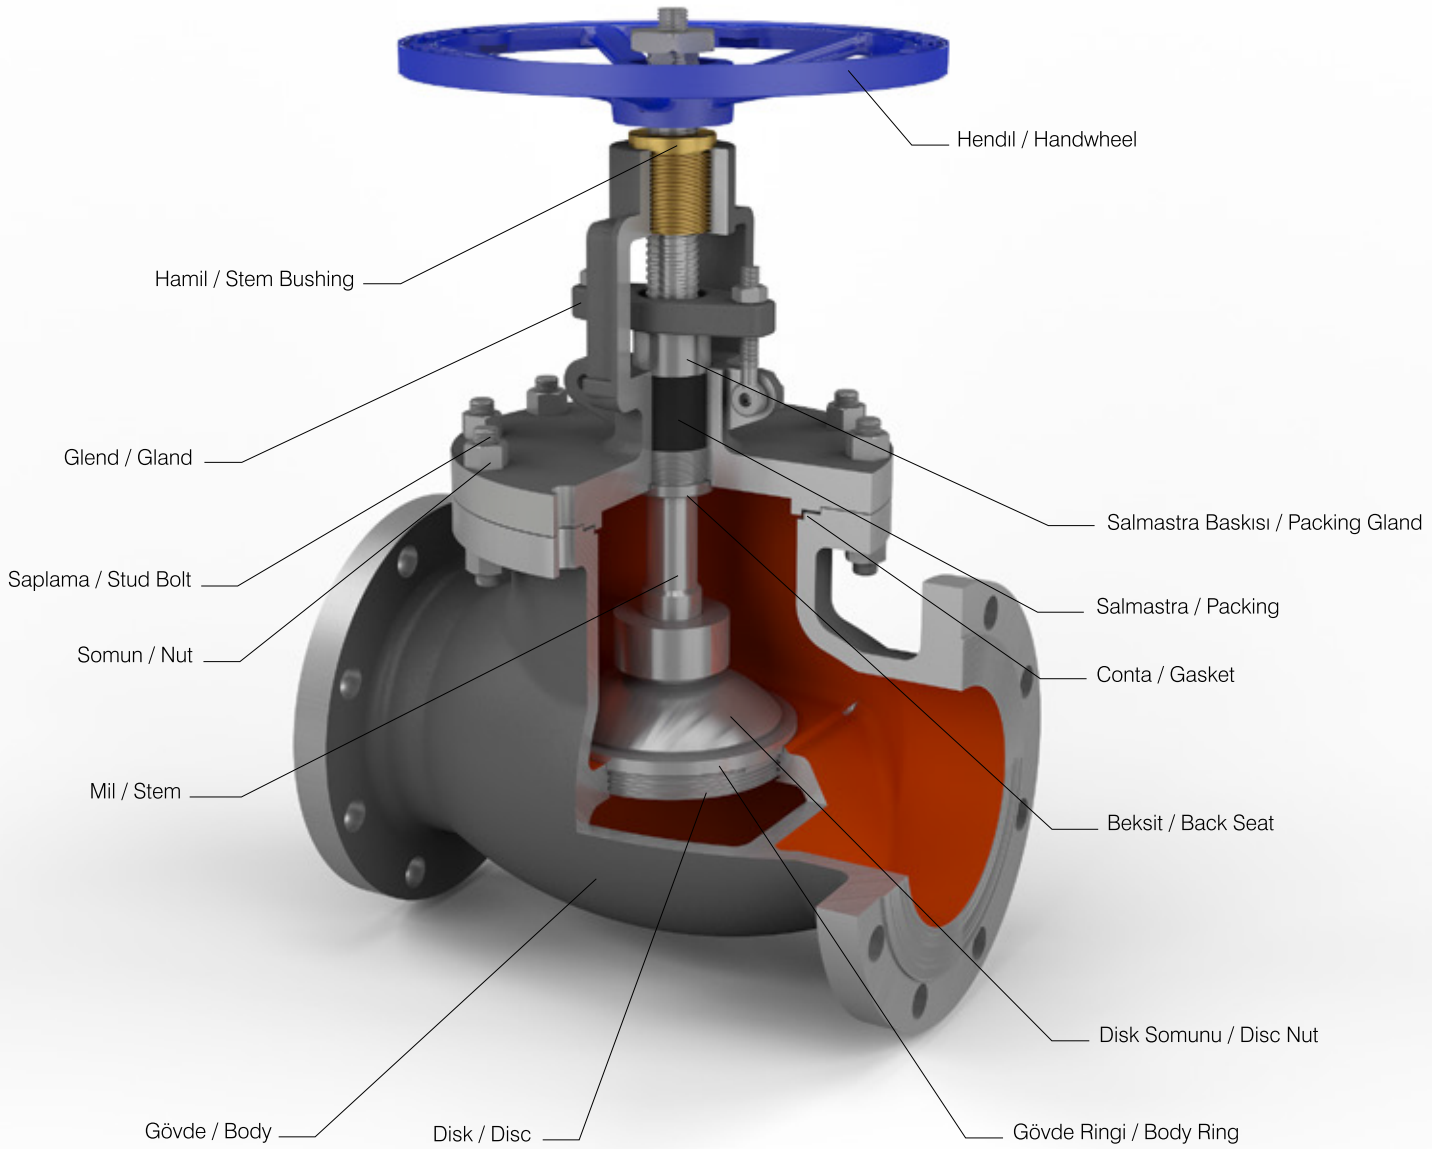

Design standard: BS 1873&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598


DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves



MALZEME SPESİFİKASYONLARI / Material Specifications


PARÇA ADI / PART NAME		
1	GÖVDE Body	Cast Steel
2	GÖVDE RİNGİ Body Ring	Carbon Steel
2a	GÖVDE RİNGİ YÜZEYİ Body Ring Face	Stainless Steel
3	DİSK Disc	Cast Steel
3a	DİSK YÜZEYİ Disc Face	Stainless Steel
4	YARIMAY PUL Washer	Stainless Steel
5	DİSK SOMUNU Disc Nut	Stainless Steel
6	MİL Stem	Stainless Steel
7	CONTA Gasket	SS Spiral Wound Gasket (SWG)
8	KAPAK Bonnet	Cast Steel
9	BEKSİT RİNGİ Back Seat Ring	Stainless Steel
10	SALMASTRA Packing	Graphite
11	KAP. SAPLAMALARI Bonnet Stud - Bolt	CrMo Steel
11a	KAP. SAPL. SOMUNLARI Bonnet Stud Nut	Carbon Steel
12	SALMASTRA BASKISI Packing Gland	Stainless Steel
13	GLEND Gland	Cast Steel
14	GLEND SAPLAMASI Gland Bolt	Stainless Steel
15	HAMIL (MİL BURCU) Stem Bushing	Carbon Steel
16	HENDİL Handwheel	Ductile Iron
17	HENDİL PULU Handwheel Washer	Steel
18	HENDİL SOMUNU Handwheel Nut	Steel
19	GRESÖRLÜK Grease Fitting	Steel
20	İSİM PLAKASI Name Plate	Aluminium

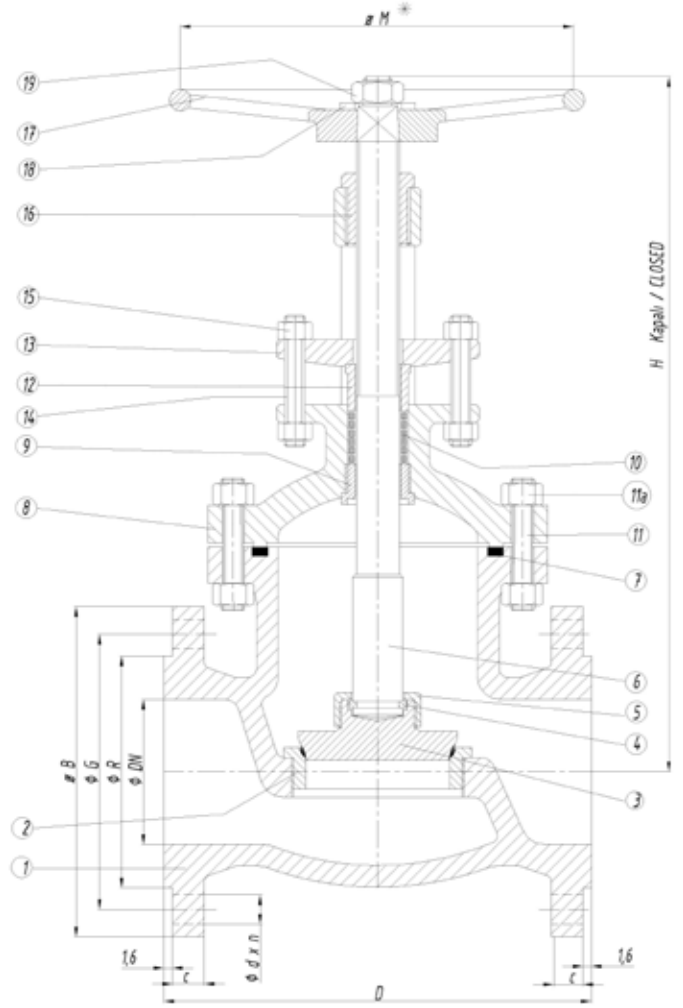



ASA150-ASA 300 DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves Figure V 3010-V 3020

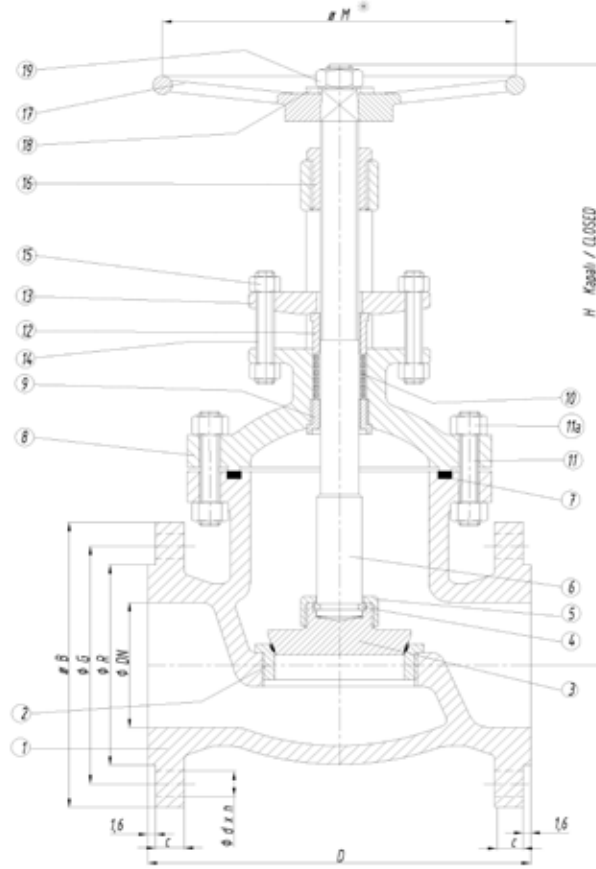

ASA 150 Figure V 3010	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø dxn	D	H	Ø M*	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	152,4	120,6	92	19,1	19 x 4	203,2	350	200	22
	2 ½	65	177,8	139,7	104,8	22,3	19 x 4	216	385	230	27
	3	80	190,5	152,4	127	23,9	19 x 4	241,3	400	230	38
	4	100	228,6	190,5	157,2	23,9	19 x 8	292,1	525	250	60
	5	125	254	215,9	185,7	23,9	22,2 x 8	355,6	530	300	80
	6	150	279,4	241,3	215,9	25,4	22,2 x 8	406,4	600	350	94
	8	200	342,9	298,4	269,9	28,6	22,2 x 8	495,3	690	400	180
	10	250	406,4	362	323,8	30,2	25,4 x 12	622,3	745	500	270
	12	300	482,6	431,8	381	31,8	25,4 x 12	698,5	810	500	430
	14	35	533,4	476,2	412,8	35	28,5 x 12	787,4	960	550	500

ASA 300 Figure V 3020	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø dxn	D	H	Ø M*	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	165	127	92	22,4	19 x 8	266,7	350	230	27
	2 ½	65	190	149,3	104,8	25,4	22,2 x 8	292,1	380	250	38
	3	80	210	168,3	127	28,4	22,2 x 8	317,5	460	250	60
	4	100	254	200	157,2	31,8	22,2 x 8	355,6	580	350	90
	6	150	318	269,8	215,9	36,6	22,2 x 12	444,5	675	400	122
	8	200	381	330,2	269,9	41,1	25,4 x 12	558,8	780	500	275
	10	250	445	387,4	323,8	47,8	28,5 x 16	622,3	1150	500	450
	12	300	521	450,8	381	50,8	31,8 x 16	711,2	940	500	600
	16	400	648	571,5	469,9	57,2	35 x 20	863,6	1212	500	1150