




DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves

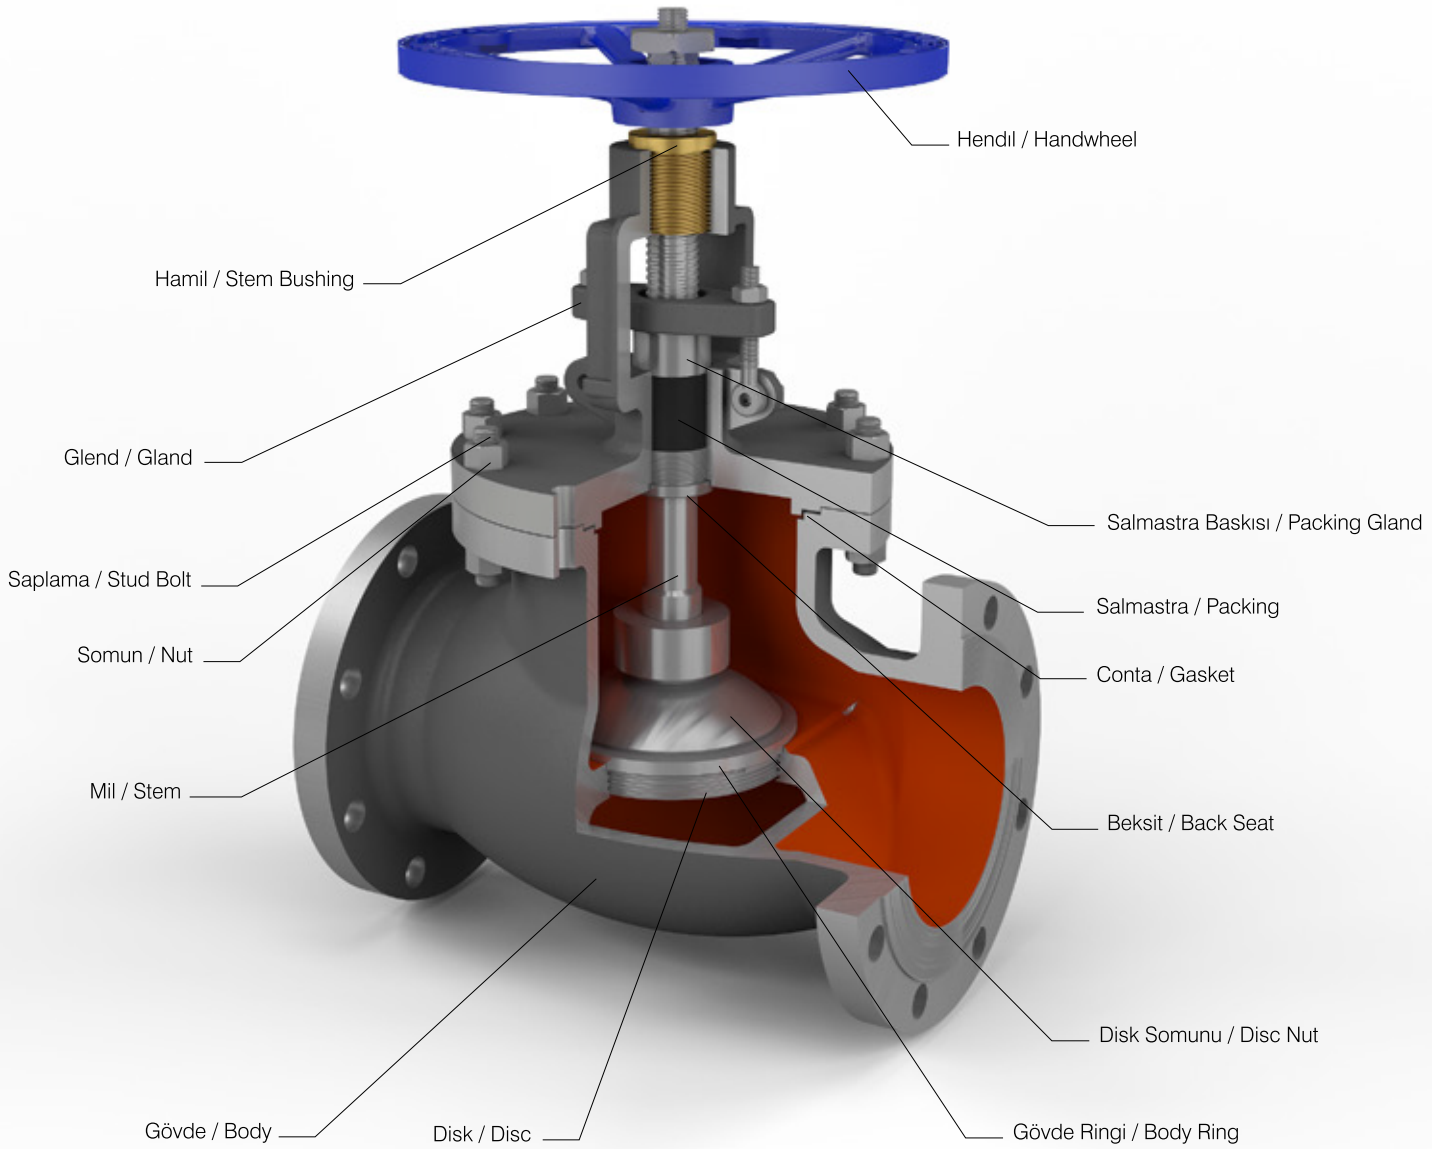

Design standard: BS 1873&ASME B16.34
Face to face standard: ANSI B16.10
Flange dimensions are according to ANSI B16.5
Inspection and test standard: API 598


DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves




MALZEME SPESİFİKASYONLARI / Material Specifications

PARÇA ADI / PART NAME		
1	GÖVDE Body	Cast Steel
2	GÖVDE RİNGİ Body Ring	Carbon Steel
2a	GÖVDE RİNGİ YÜZEYİ Body Ring Face	Stainless Steel
3	DİSK Disc	Cast Steel
3a	DİSK YÜZEYİ Disc Face	Stainless Steel
4	YARIMAY PUL Washer	Stainless Steel
5	DİSK SOMUNU Disc Nut	Stainless Steel
6	MİL Stem	Stainless Steel
7	CONTA Gasket	SS Spiral Wound Gasket (SWG)
8	KAPAK Bonnet	Cast Steel
9	BEKSİT RİNGİ Back Seat Ring	Stainless Steel
10	SALMASTRA Packing	Graphite
11	KAP. SAPLAMALARI Bonnet Stud - Bolt	CrMo Steel
11a	KAP. SAPL. SOMUNLARI Bonnet Stud Nut	Carbon Steel
12	SALMASTRA BASKISI Packing Gland	Stainless Steel
13	GLEND Gland	Cast Steel
14	GLEND SAPLAMASI Gland Bolt	Stainless Steel
15	HAMIL (MİL BURCU) Stem Bushing	Carbon Steel
16	HENDİL Handwheel	Ductile Iron
17	HENDİL PULU Handwheel Washer	Steel
18	HENDİL SOMUNU Handwheel Nut	Steel
19	GRESÖRLÜK Grease Fitting	Steel
20	İSİM PLAKASI Name Plate	Aluminium

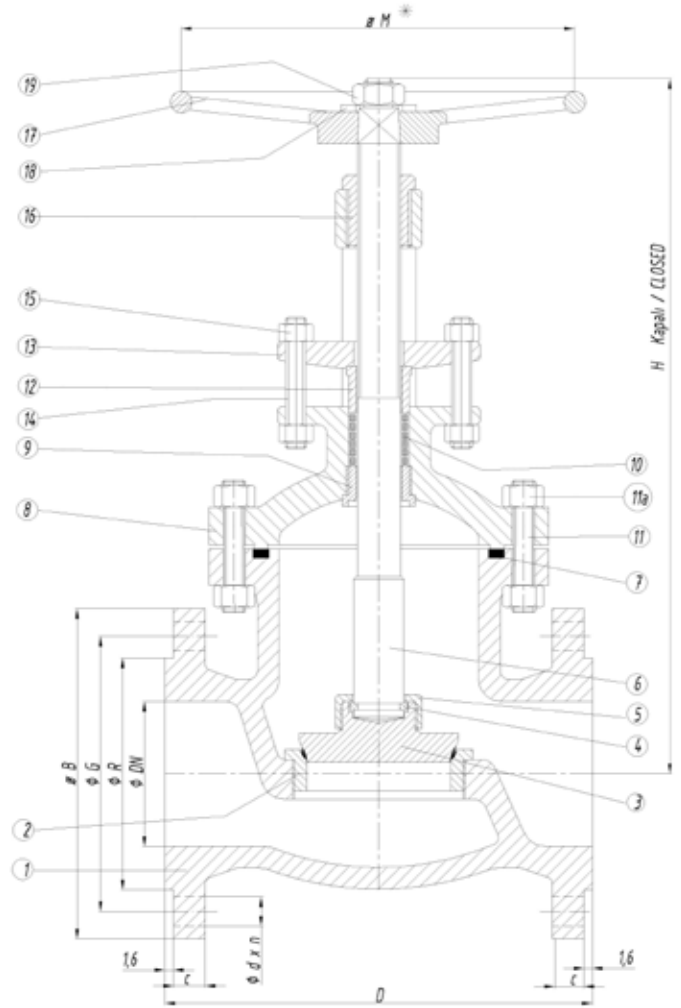

ASA 600-ASA 900 DÖKÜM ÇELİK GLOBE VALFLER

Cast Steel Globe Valves Figure V 3030-V 3040

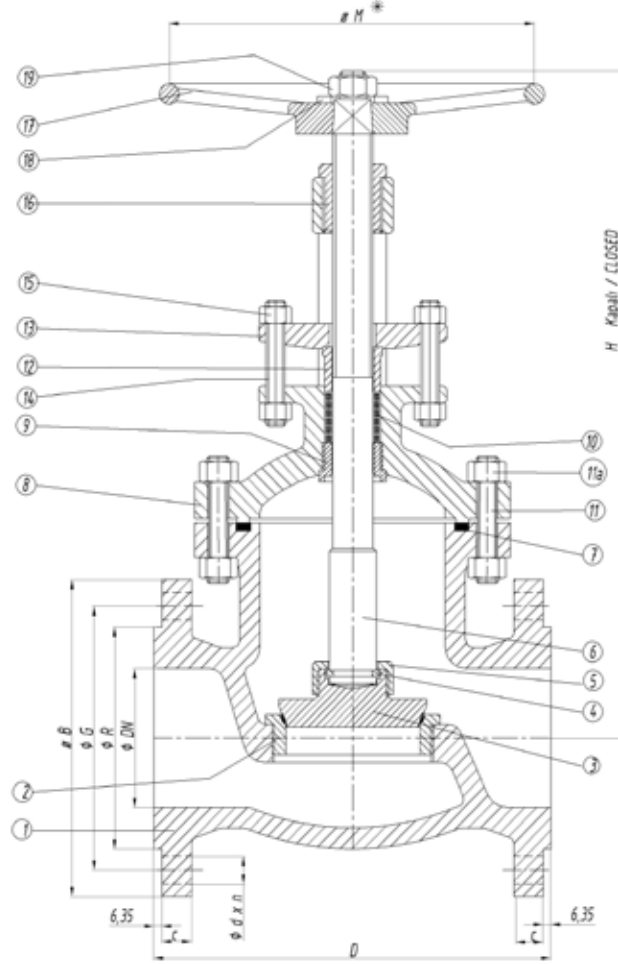

ASA 600 Figure V 3030	ÖLÇÜ/SIZE		Ø B	Ø G	Ø R	C	Ø d x n	D	H	Ø M*	App. W
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
	2	50	165,1	127	92	25,4	19 x 8	292,1	400	230	38
	2 ½	65	190,5	149,3	104,8	28,4	22,2 x 8	330,2	450	250	60
	3	80	209,6	168,3	127	31,8	22,2 x 8	355,6	520	300	65
	4	100	273	215,9	157,2	38,1	25,4 x 8	431,8	620	500	125
	6	150	355,6	292,1	215,9	47,8	28,5 x 12	558,8	900	500	298
	8	200	419,1	349,2	269,9	55,6	31,8 x 12	660,4	990	700	550
	10	250	508	431,8	323,8	63,5	35 x 16	787,4	1290	1400	730

ASA 900 Figure V 3040	ÖLÇÜ/SIZE						D	D1	App. W			
	inch	mm	Ø B	Ø G	Ø R	C	Ø d _{xn}	Raised Face	Ring Joint	H*	Ø M*	kg
	2	50	215,9	165,1	92	38,1	25,4 x 8	368,3	371,5	560	300	90
	2 ½	65	244,4	190,5	104,8	41,1	28,5 x 8	419,1	422,3	600	350	118
	3	80	241,3	190,5	127	38,1	25,4 x 8	381	384,2	620	350	130
	4	100	292,1	235	157,2	44,5	31,8 x 8	457,2	460,4	720	450	185
	6	150	381	317,5	215,9	55,6	31,8 x 12	609,6	612,8	940	500	372

Not: Ölçü, basınç sınıfı, bağlantı, model, gövde ve trim malzemesi seçimleri müşteri tarafından sipariş kodlarına göre yapılır.

Note: Dimensions, pressure class, connection type, model, body and trim materials are specified by purchaser according to the order codes.